

# ANATOM 78S / INOX

WITH Awax safety module



## CODED NON-CONTACT SAFETY SWITCH IN STAINLESS STEEL FOR HARD ENVIRONMENT

- Decoding by Acotom®2 process
- Misalignment : ±7 mm of length
- Detecting distance/hysteresis : 10 /+2 (mm)
- Auxiliary output for automation control
- LED indication of switch condition
- Available with M12 connector ANATOM78S/INOX/MKT
- Protection class IP69K
- Temperature -20°C to +60°C


### SAFETY CATEGORY

- Anatom78S inox : EN60947-5-3
- 1 Anatom78S/ inox with Awax : category 4
- Anatom78S/ inox in series with Awax : category 3

### WIRING DIAGRAM

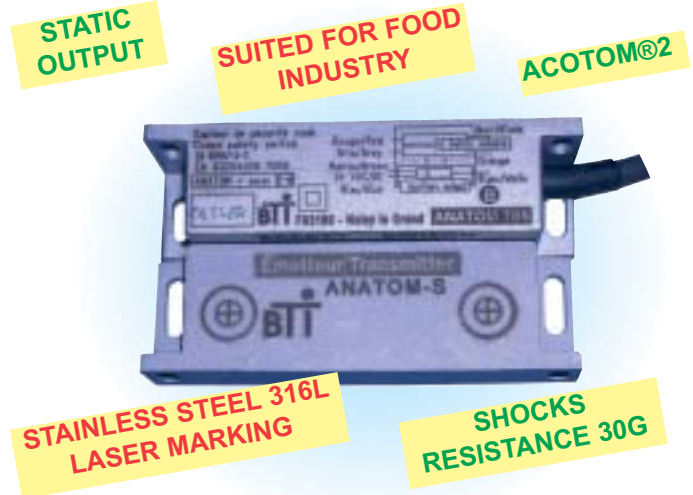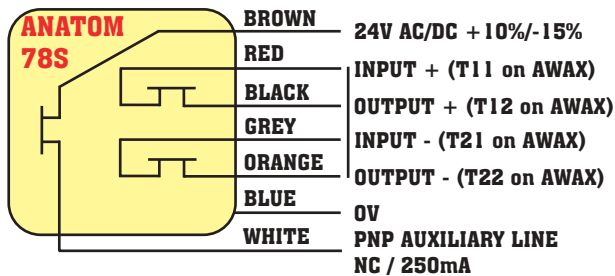

### DIMENSIONS

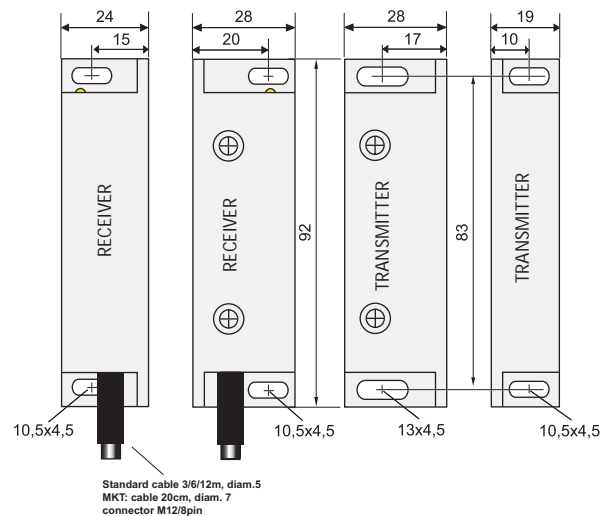


### PIN DETAILS

FRONT VIEW ANATOM78S/MKT



- 1 white: T12 5 grey: 0V
- 2 brown: T21 6 pink: T11
- 3 green: AUX 7 blue: T22
- 4 yellow: +24V 8 red: nc (nc : non connected)



### ADVICE

Ideal for food industry because of its resistance to chemical cleaning materials. Ideal for machines with vibration.



**INDUSTRIAL  
SAFETY CONTROLS INC.**

P.O. Box 126 -- 4112 Sheridan Road  
Kenosha, WI 53141

**(262) 652-8660 -- Fax: (262) 652-1388**

E-mail: [safetysensing@earthlink.net](mailto:safetysensing@earthlink.net)